AmiNET125 Cover.qxd 31/8/06 1:56 pm Page 1

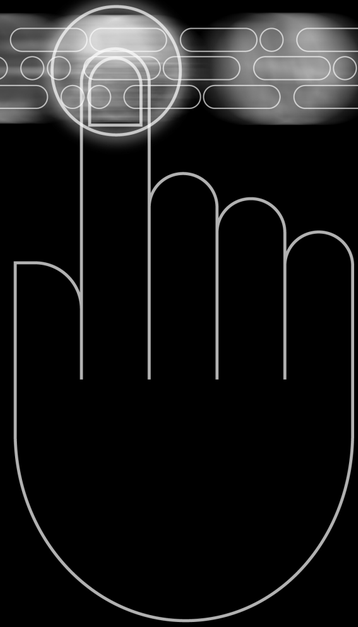

AmiNET125 Installation Guide

amino

Amino (EMEA)
Buckingway Business Park
Anderson Road
Swavesey
Cambridgeshire
CB4 5UQ
UK
Tel: +44 1954 234100
Fax: +44 1954 234101

Amino (Americas)
3625 Brookside Parkway
Suite 150
Alpharetta
GA 30022
USA
Tel: +1 678 636 6000
Fax: +1 678 636 6001

Amino (Asia Pacific)
Suite 1115 11/F West Wing Office Building
New World Centre
20 Salisbury Road
Tsim Sha Tsui
Kowloon
Hong Kong
Tel: +852 3155 7300
Fax: +852 3155 7301

Email: info@aminocom.com
Web: www.aminocom.com

Version 1.0

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:43 Page ii

Thank you for choosing the Amino AmiNET125 STB

Please follow the instructions in this installation guide carefully in order to quickly and safely start enjoying the benefits of digital TV. We advise carefully reading all of the enclosed safety and installation instructions before using the AmiNET125. Please keep this installation guide close to your AmiNET125 for future reference.

Your service provider will give you a separate *User Guide* that will explain how to access the services and features that are available through your digital TV service.

Product safety

Warnings, Cautions and Notes

Throughout this manual, please pay special attention to the following indications of potentially hazardous situations:

Warning!
Indicates a hazardous situation, which, if not avoided, could result in serious injury.

Caution!
Indicates a situation, which, if not avoided, could damage the product or other devices.

Note!
Indicates additional information to the user to make the user aware of possible problems and to help the user understand, use and maintain the product.

Warnings, Cautions and Notes are included in the product literature to ensure your safety and the correct operation of the product – please adhere to them.

Attachments

Use only the supplied accessories and attachments with your AmiNET125. Use of accessories or attachments that are not supplied or approved by the manufacturer may be unsafe, may be detrimental to the life or performance of the AmiNET125 and will immediately invalidate any product warranty.

Water and moisture

To reduce the risk of fire or electric shock, this product, its accessories and attachments must not be exposed to any liquids, rain or moisture. The product must not be exposed to dripping, splashing or high humidity. Do not use this product in any location where it may become in contact with any liquid or vapor.

Product care

Servicing

This product contains no user-serviceable parts.

The product must not be dismantled. Attempts to dismantle the product may be unsafe, may be detrimental to the life or performance of the product and will immediately invalidate any product warranty.

Servicing must only be attempted by suitably qualified service personnel.

The AmiNET125 has tamper-evident seals. Breaking or modifying these seals in any manner will immediately invalidate the product warranty.

Cleaning

The product, accessories and attachments should only require occasional wipe with a dry cloth. Unplug the mains plug from the wall outlet before cleaning the product.

The silver aluminum case of the AmiNET125 may be cleaned with a slightly damp cloth to remove stubborn marks.

Do not spray any substance or use any polishes, thinners, abrasive cleaning products, liquids or aerosol products to clean the product, its accessories or attachments.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:43 Page iii

Unpacking and installing the product

Once removed from the transit packaging, the AmiNET125 must be handled with care and must not be dropped, shaken or exposed to any physical shock.

The AmiNET125 is designed to be mounted either horizontally or vertically on a hard flat surface.

Do not place the AmiNET125 where it may be subject to physical shock or vibration or where the product may drop, topple, slide or shake as this may cause personal injury or irreparable damage to the product, which will not be covered by the manufacturer's warranty.

Do not operate the AmiNET125 on a soft surface such as carpet, rug, bed etc as these surfaces will obstruct airflow, may cause the product to overheat and will invalidate the warranty.

Do not install the AmiNET125 into any built-in installation such as bookcase or rack without ensuring that a minimum of 4" of clear space is available at the front, rear, sides and top of the product.

Do not install the AmiNET125 where it may be exposed to direct sunlight or radiant, convected or conducted heat from an open fire or radiator.

The AmiNET125 should not be placed on any surface that may become warm in use (such as on top of a VCR or A/V amplifier) and nothing should be placed on top of the AmiNET125.

Do not cover the AmiNET125.

Objects containing liquids, such as vases, flowerpots etc must not be placed on top of the product.

Do not pick the product up or move the AmiNET125 whilst it is operating. If the product must be moved, please pull the mains power cord out of the wall socket and wait 30 seconds before moving the product.

The AmiNET125 is not suitable for outdoor use.

The leads and power-supply cord must be routed where they cannot be walked on, chafed, tripped over or pinched by items being placed on or against them. Power-supply cords must not be routed underneath carpets or rugs where any damage could not be seen.

Power sources

The AmiNET125 must ONLY be used with the power supply supplied by the manufacturer. The power supply is fitted with a plug that is designed for use with the power source of the country of installation. If it is necessary to operate the product in another country or geographical area with a different power source, an approved adapter for that country or location must be obtained from the manufacturer.

Operation

The AmiNET125 and power supply will get warm to the touch when in use. If the AmiNET125, power supply or attachments become hot to the touch, immediately unplug the AmiNET125 from the mains electricity supply and call your service provider to arrange replacement.

Lightning protection and not in use

If lightning is expected, or the product is not going to be used for a long period of time, please unplug the mains cord from the wall outlet, unplug the digital TV network connection from the rear of the product and unplug the video and RF leads to the Television. This will help protect the product from damage due to lightening and power surges.

Use with Plasma displays

When used with certain display types, such as Plasma displays, it is important that the picture is not paused for a long time (greater than 5 minutes) as the image displayed may then be 'burned' permanently into the screen of the display device. This effect is not a defect of the AmiNET125 but a limitation of the display device. Amino Communications Limited will not be held liable for damage thus caused.

Intent of use

The AmiNET125 is intended for the reception and recording of TV picture and sound signals. Any other application is expressly prohibited.

It is intended by Amino Communications Limited that this AmiNET125 be used in full compliance of all copyright laws of the United States. It is the users responsibility to comply with such laws. Unauthorized recording of copyrighted material or providing copies of such programs to others may, in certain circumstances, violate copyright law and prior permission from the copyright owners may be required for certain public performances and certain commercial uses.

Software updates

This product is designed to evolve and as a consequence, it benefits from software updates provided and installed automatically by your service provider. Amino Communications Limited and your Service Provider reserve the right to automatically update the software on the product in order to improve the product functionality.

During software updates, the AmiNET125 cannot be used and must not be switched off until the software update is complete.

The first time it is powered, it is possible that the AmiNET125 will immediately start updating itself with the latest operating software. While the software is updating it is important that the AmiNET125 is not switched off. The software update will be complete after a few minutes and you will then be ready to enjoy the full benefits of your new digital TV service.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:43 Page iv

Software license

Software License Agreement

IMPORTANT – READ CAREFULLY: By using the software in your AmiNET125, you agree to be bound by the terms of this Software License Agreement. If you do not agree to be bound by the terms of this agreement, you must immediately cease all use of the product and return the product and all accessories, in the original packaging to your service provider.

License Grant; Restrictions

Subject to the terms of this agreement, Amino Communications Ltd and your service provider jointly grant you a non-exclusive, non-transferable license, without the right to sub-license, to use all software included with the product or subsequently provided to you, and all documentation solely for your noncommercial use and solely in connection with your use of the product. You acknowledge and agree that Amino Communications Ltd and your service provider may periodically update, modify or enhance the product software. You agree that; a) you will not attempt to modify, enhance, disassemble, decompile, reverse engineer or otherwise attempt to gain access to the source code to the software; and b) you will not attempt to remove or unbundle the software from the product. Any resale or transfer of the product by you will be subject to the terms and conditions of this agreement.

Ownership

Amino Communications Ltd and its licensors own and retain all proprietary rights, including all patent, copyright, trade secret, trademark and other intellectual property rights in and to the software and to any enhancements or modifications to the software. You acknowledge that the license granted under this agreement does not provide you with title or ownership to the software but only to a right of limited use under the terms and conditions of this agreement.

Software warranties

To the maximum extent permitted by applicable law, the Company makes no representations and disclaims any and all warranties, express or implied with respect to the software, including, without limitation, any implied warranty of merchantability, fitness for purpose, non-infringement of third part rights and those arising from a course of dealing or usage of trade. No representation is made or warranty is given that use of the software will be defect free or error free or uninterrupted, that any defects or errors will be corrected or that the functionality of the software will meet your requirements. Because some US states do not allow all disclaimers of warranty, these limitations may not apply to you.

Limitation of Liability

To the maximum extent permitted by applicable law, the Company, its suppliers and licensors will not be liable for loss of profits, business interruption, loss of information or data or other pecuniary loss or for any consequential, indirect, incidental, special, punitive or other damages whatsoever arising out of this agreement or the use or inability to use the software, even if the Company or its suppliers or licensors have been advised of the possibility of such damages. Because some US states do not allow such exclusion or limitation of liability, these limitations may not apply to you.

Termination

This agreement and the licenses granted hereunder shall immediately terminate if you fail to comply with the license limitations described in this agreement. No notice will be required from the Company to effect such termination.

On termination of this agreement you must return all hardware, software and product documentation and accessories to the service provider.

Export Controls

You acknowledge and agree that none of the software or underlying information or technology may be downloaded or otherwise exported or re-exported: a) into (or to a national or resident of) Angola, Cuba, Iran, Iraq, Libya, North Korea, Sudan, Syria, or any other country to which the US has embargoed goods; or any one on the US Treasury Department's list of Specially Designated Nationals or the US Commerce Department's Table of Denial Orders. By using the software, you represent and warrant that you are not a resident or national of any such country or on any such list. This software is a commercial product and is provided with restricted rights. Use, reproduction, release, modification or disclosure of the software or any part thereof including technical data is restricted in accordance with Federal Acquisition Regulation (FAR) 21.212 for civilian agencies and Defense Federal Acquisition (DFARS) 227.7202 for military agencies.

Miscellaneous

This agreement shall, in all respects, be governed by the laws of the State of Georgia without reference to its principles or conflicts of laws. You hereby agree that all disputes arising out of this agreement shall be subject to the exclusive jurisdiction and of and venue in the federal and state courts within Atlanta, Georgia, and you hereby consent to the personal and exclusive jurisdiction and venue of these courts.

If any of the provisions of this agreement are held to be invalid under any applicable statute or rule of law, they are, to that extent, deemed omitted. The waiver of any breach or default, or any delay in exercising any rights shall not constitute a waiver of any subsequent breach or default. This agreement constitutes the complete and exclusive agreement between you and the Company with respect of the subject matter hereof and supercedes all prior oral or written understandings, communications or agreements. This agreement may not be modified except in writing by a duly authorized representative of the Company.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:43 Page v

Contents

Introduction 1

About your AmiNET125 1

Getting started 1

Setting up the AmiNET125 3

Unpacking the AmiNET125 4

Connecting up the AmiNET125 5

Setting up the Amino remote control 9

Using the Amino remote control with your AmiNET125 11

Controlling the AmiNET125 12

Using the Amino remote control with your TV 15

Configuring the remote control 16

TV brand codes 18

Specification 24

Index 25

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:43 Page vi

Copyright Notice
© Amino Communications Ltd. All rights reserved. Printed in China.

Amino, AmiNET and AmiNET125 are trademarks of Amino Communications Limited. All other product or brand names as they appear are trademarks or registered trademarks of their respective holders.

This document contains proprietary information of Amino Communications Limited (The “Company”) No part of this document may be copied, reproduced, transmitted, distributed, transcribed, stored in a retrieval system, modified or translated into any other language or computer language, or sublicensed in any form or by any means – electronic, mechanical, magnetic, optical, chemical, manual or otherwise – without the prior written consent of the Product Manager at the Company, Anderson Road, Buckingway Business Park, Swavesey, Cambridgeshire, CB4 5UQ, UK. Any unauthorized or otherwise improper use of this document or the materials herein contained by any person will subject that person to liability for damages.

Disclaimer
The Company shall not be liable for any errors contained herein nor for any damages arising out of or related to this document or the information contained within it, even if the Company has been advised of the possibility of such damages.

This document is intended for informational and instructional purposes only. The Company reserves the right to make changes to the specifications and other information contained in this document without prior notification.

Warranty
A warranty for your AmiNET125 IP STB is offered through your service provider. In the case of your AmiNET125 requiring servicing, please contact your service provider directly.

Trademarks
Dolby and the double-D symbol are trademarks of Dolby Laboratories.

Manufactured under license from Dolby Laboratories.

Irdeto is the trademark of Mindport BV.

Widevine is the trademark of Widevine Technologies Inc.

Secure Media is the trademark of Secure Media Natick, MA.

Macrovision U.S. Patent numbers 4,631,603, 4,577,216 and 4,819,098 licensed for limited pay-per-view uses only. This product incorporates copyright protection technology that is protected by U.S. patents and other intellectual property rights. Use of this copyright protection technology must be authorized by Macrovision and is intended for home and other limited pay-per-view uses only unless otherwise authorized by Macrovision. Reverse engineering or disassembly is prohibited.

Approvals

FCC Registration and Requirements
The following paragraphs describe requirements and information based on FCC rules:

FCC Rules, Part 15
This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio-frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio of television, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation

Company Name: Amino Communications Ltd
Address: Buckingway Business Park, Anderson Road, Swavesey, Cambridge, Cambridgeshire, CB4 5UQ, United Kingdom.

Safety
Product:
AmiNET125 IP Set-Top Box

Rating:
5VDC, 1.2A, Class III

Conformity:
IEC 60065:2001
CAN/CSA-C22.2 No. 60065-03
UL 6500
AS/NZS 60065:2003

WEEE Directive (2002/96/EC)
The AmiNET125 is in compliance with the WEEE Directive.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:43 Page 1

Introduction

Describes the features provided by your AmiNET125 set-top box.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:43 Page 2

About your AmiNET125

Welcome to the AmiNET125, a stylish set top box which enables you to receive live TV and movies over your digital TV service.

You control all the functions of the AmiNET125 using the Amino infra-red remote control in conjunction with on-screen menus provided by your service provider.

Controlling TV

The AmiNET125 will typically allow you to choose what you want to view by keying in the channel number, stepping through the channels, or by selecting programs from an on-screen electronic program guide.

To insert a viewing card

Do not insert or remove a viewing card until prompted by the on-screen display, or you may damage the card.

- Insert the card fully into the slot on the front panel on the AmiNET125 with the gold coloured pads facing down and away from you.

Getting started

Please refer to the next chapter for information about unpacking and connecting up your AmiNET125.

Alternatively, if your AmiNET125 has already been set up for you by your provider, see *Using the Amino remote control with your AmiNET125*, page 11, for information about using your product.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 3

Setting up the AmiNET125

Explains how to unpack your AmiNET125 and connect it to your TV, and the other equipment in your audio and video system.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 4

Unpacking the AmiNET125

The AmiNET125 and its accessories are packed in a recyclable board and plastic package. Please keep all packaging in case you need to transport the unit at a later date.

The AmiNET125 is supplied with the following accessories:

Power supply for AmiNET125



Video lead

3 x AAA batteries for remote control*

Amino remote control*

* Your service provider may supply a different remote control from that shown.

If any of these accessories are missing please contact your service provider.

The front window of the AmiNET125 is protected with a clear plastic film, and this should be removed and disposed of before using the product.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 5

Connecting up the AmiNET125

The following diagram shows how to connect up your AmiNET125 in a typical installation including a TV, VCR, and AV amplifier:

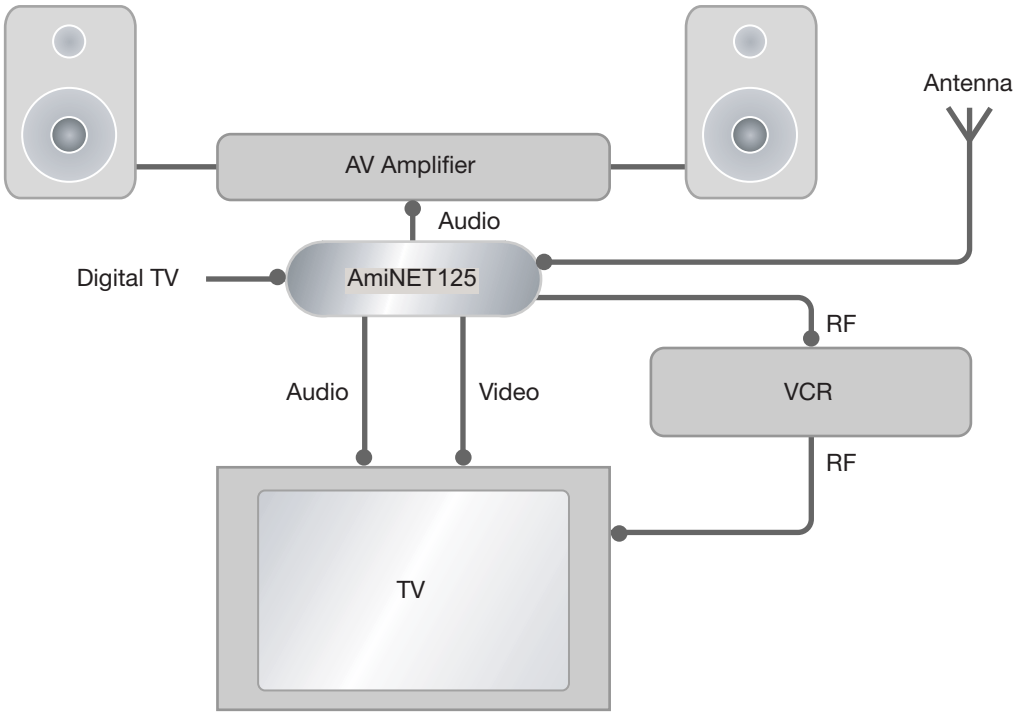

Warning!
Before connecting or disconnecting any cables, switch off all system devices (TV, VCR, AV Amplifier, etc) and disconnect from the mains electrical supply.

If your system does not include a VCR connect the RF output from the AmiNET125 directly to the input of your TV.

If your system does not include an AV amplifier leave the digital output of the AmiNET125 unconnected.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 6

Back panel connections

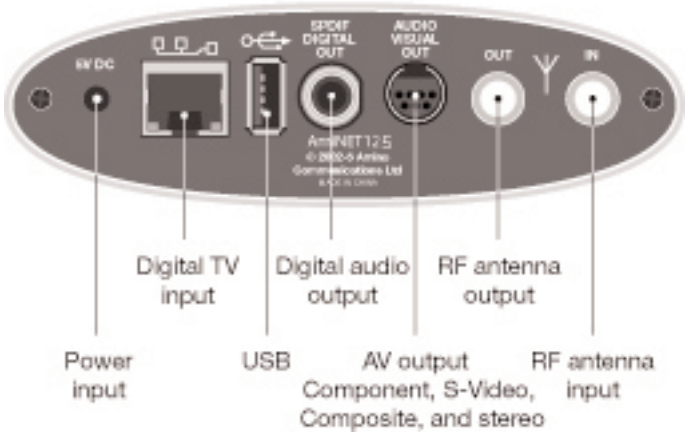

The following sections give more detailed information about connecting the AmiNET125 to each of the other components in your system.

Connecting RF

- Unplug the cable coming from the antenna from the back of your VCR or TV and plug it into the RF antenna IN input of the AmiNET125.
- Connect the RF antenna OUT connector on the back of the AmiNET125 to the RF IN connector on the VCR, or on the TV if you do not have a VCR, using a standard RF cable available from retail outlets.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 7

Connecting video

The AmiNET125 provides the following video outputs:

- Component Video (Y, Pr, Pb), which gives the best picture quality.
- RGB SCART is used primarily in Europe and provides equivalent quality to Component
- S-Video, which gives good picture quality.
- Composite Video (CVBS), which gives standard picture quality.
- RF, which gives the same quality as broadcast TV.

Use the highest quality connection available on your other equipment.

- Your Service Provider will supply a SCART, Component or combined S-Video/Composite cable with the AmiNET125. If your TV has different inputs from the lead supplied, please contact your Service Provider for an alternative.
- If your television only provides an RF input the AmiNET125 will deliver a good picture on the appropriate TV channel, as selected on the AmiNET125 Setup screen. The RF connection also supplies the audio, so a separate audio connection is not required.

Connecting audio

The AmiNET125 provides the following audio connections:

- Left and right audio for stereo sound (on the AV output).
- S/P DIF digital output for high quality surround sound, when used with an external decoder and amplifier (not supplied).

If you are using the Component Video, S-Video, or Composite Video outputs you should connect the audio left and right connectors included in the lead to the television or AV amplifier to provide sound.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 8

If you have a separate AV surround sound amplifier with electrical S/P DIF input:

- Connect the digital audio output from the AmiNET125 to a suitable digital audio input on the AV amplifier using a standard S/P DIF lead (not supplied) to allow you to listen to Dolby 5.1 surround sound, or Windows Media Audio Pro when available.

Connecting to the digital TV network

The AmiNET125 can receive TV and movies from the digital TV network. Your service provider will have already installed a connection to this network.

- Connect the Digital TV network lead provided by your service provider to the Digital TV input on the AmiNET125.

Connecting power

The AmiNET125 is provided with a low voltage power supply.

- Connect the power lead from the power supply to the power input of the AmiNET125.
- Connect the mains power to your TV, video recorder, AmiNET125 power supply (using the supplied lead), and AV amplifier.

Caution!
After unpacking the AmiNET125 please wait until it has reached room temperature before applying power as condensation may damage the product.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 9

Setting up the Amino remote control

This section explains how to unpack and set up the Amino remote control.

Your service provider may have supplied an alternative remote control, in which case please refer to the User Guide supplied by your service provider for instructions on setting up and using the remote control.

The front window of the remote control is covered with a protective clear plastic film, which should be removed and disposed of prior to use.

Inserting batteries

The remote control requires three batteries type AAA, MN2400, UM-4, or LR03.

For best performance we recommend using Alkaline batteries.

- Open the battery cover by pushing lightly on the recess and sliding the cover downwards:

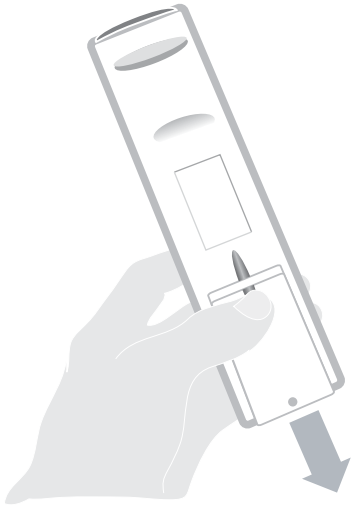

- Insert the batteries, taking care to observe the correct polarity:

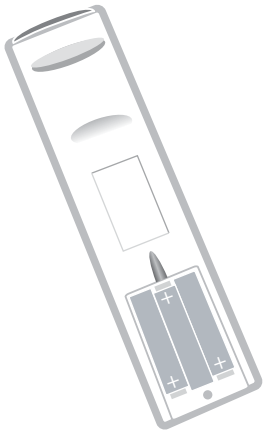

- Replace the battery cover by sliding the cover upwards until it clicks into place:

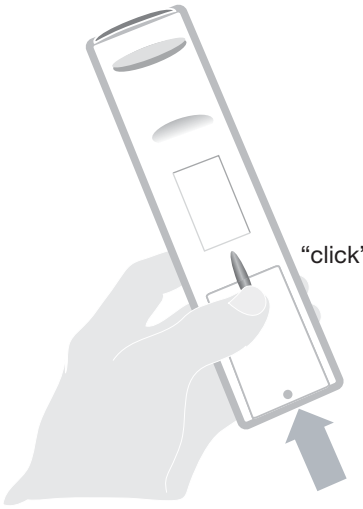

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 10

Childproof feature

You can optionally secure the battery compartment with the screw provided to prevent children from opening the compartment:

- Remove the battery cover as described above, and using a suitable screwdriver remove the silver screw at the base of the remote control:

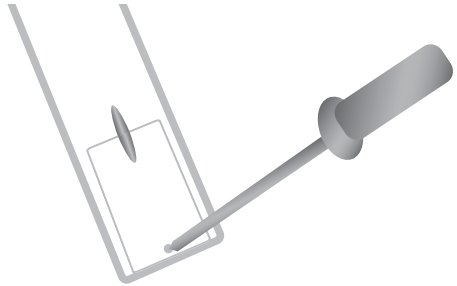

- Replace the battery cover.
- Fit the screw at the base of the cover, taking care not to overtighten it.

Important information about using batteries

Do not mix different types of battery or old and new batteries.

Do not use rechargeable batteries with the remote control.

Remove the batteries from the remote control if you are not going to use it for several weeks, to avoid the risk of leakage.

Please respect your environment and any local regulations and dispose of old batteries in a responsible manner.

Caution!
Do not attempt to recharge the batteries.
Immediately remove any leaking batteries. Take care when handling leaking batteries as they may cause burns to the skin or eyes, or other physical injuries.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 11

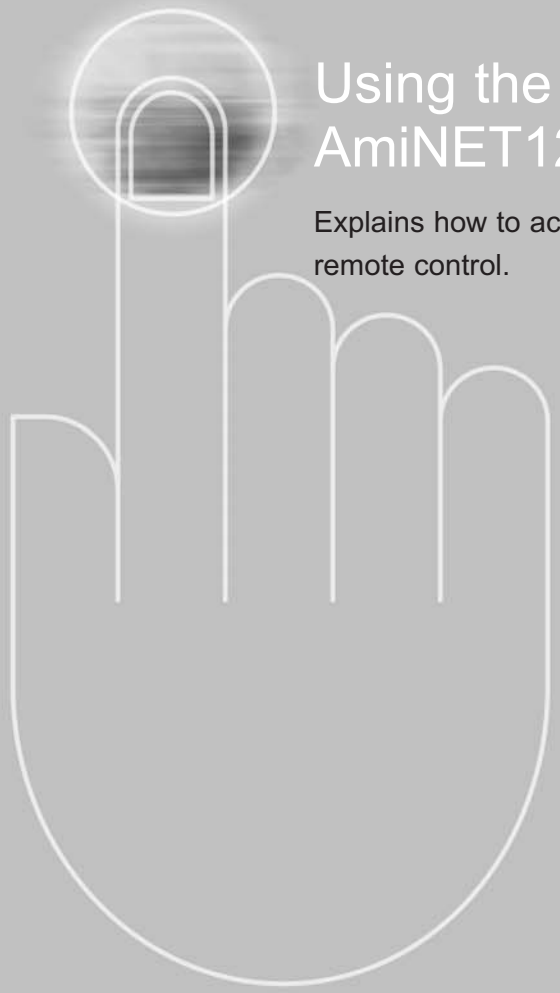

Using the Amino remote control with your AmiNET125

Explains how to access all the features of your AmiNET125 using the Amino remote control.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 12

Controlling the AmiNET125

To control the AmiNET125 press the **STB** button on the remote control. The **STB** mode–select button will light for one second to indicate that the mode has been set.

When any valid function button on the remote is pressed, the **STB** button will light to indicate that a command is being transmitted in STB mode.

Switching on or off

To turn the AmiNET125 on or off:

- Press the power button on the Amino remote control.

The red light on the front of the AmiNET125 illuminates to indicate power on.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 13

Using the remote to control the AmiNET125

In Set-Top Box (STB) mode, the remote can control the following functions of the AmiNET125:

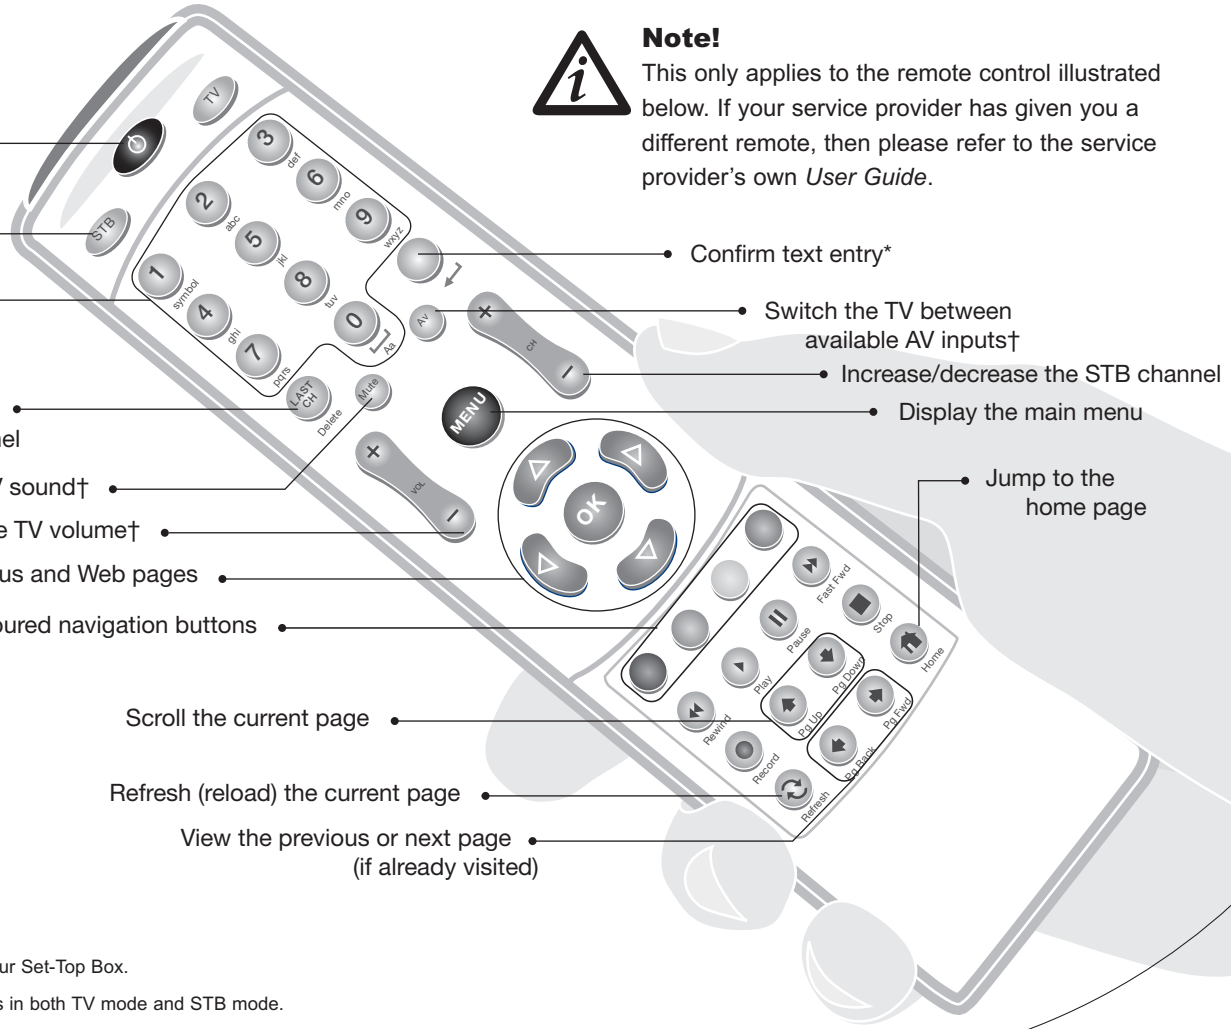

Note!

This only applies to the remote control illustrated below. If your service provider has given you a different remote, then please refer to the service provider's own *User Guide*.

* Text entry may not be supported by your Set-Top Box.

† These buttons control the TV functions in both TV mode and STB mode.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 14

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 15

Using the Amino remote control with your TV

Explains how to set up and use the Amino remote control to operate your TV.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:44 Page 16

Configuring the remote control

In order for the remote to transmit the correct signals to control the TV, the remote must be programmed with a three-digit code corresponding to the type of TV in use.

To do this proceed as follows:

- Identify the make of the TV; eg Sony, Magnavox etc.
- Find the TV make listed in the TV brand code tables in the next section.
- Simultaneously press and hold the **TV** and **OK** buttons on the remote.

After approximately two seconds, the **TV** button will light.

- Release the **TV** and **OK** buttons.

The TV button remains illuminated.

- Enter the three-digit brand code according to the make of the TV that is being controlled.

As each of the digits are entered, the **TV** button will briefly flash off and on again

When the third digit has been entered, the **TV** button will go out.

If a TV brand code has been entered that the remote does not recognize, the **TV** button will flash rapidly for a second and remain illuminated. If this happens: re-enter the correct TV brand code.

- Verify that the remote control works with the TV.

Most TV makes have more than one brand code listed in the brand code table – if this is the case try all brand codes that are listed for that make until a suitable match is found.

If no brand code is listed for the TV, try brand codes for Philips and NEC TVs.

If no brand code works for your TV, please contact your service provider who may be able to help.

Controlling a TV

To control the TV press the **TV** button on the remote control. The **TV** mode–select button will light for one second to indicate that the mode has been set.

When any valid function button on the remote is pressed, the **TV** button will light to indicate that a command is being transmitted in TV mode.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:45 Page 17

Using the remote control to control a TV

In TV mode, the remote can control the following TV functions:

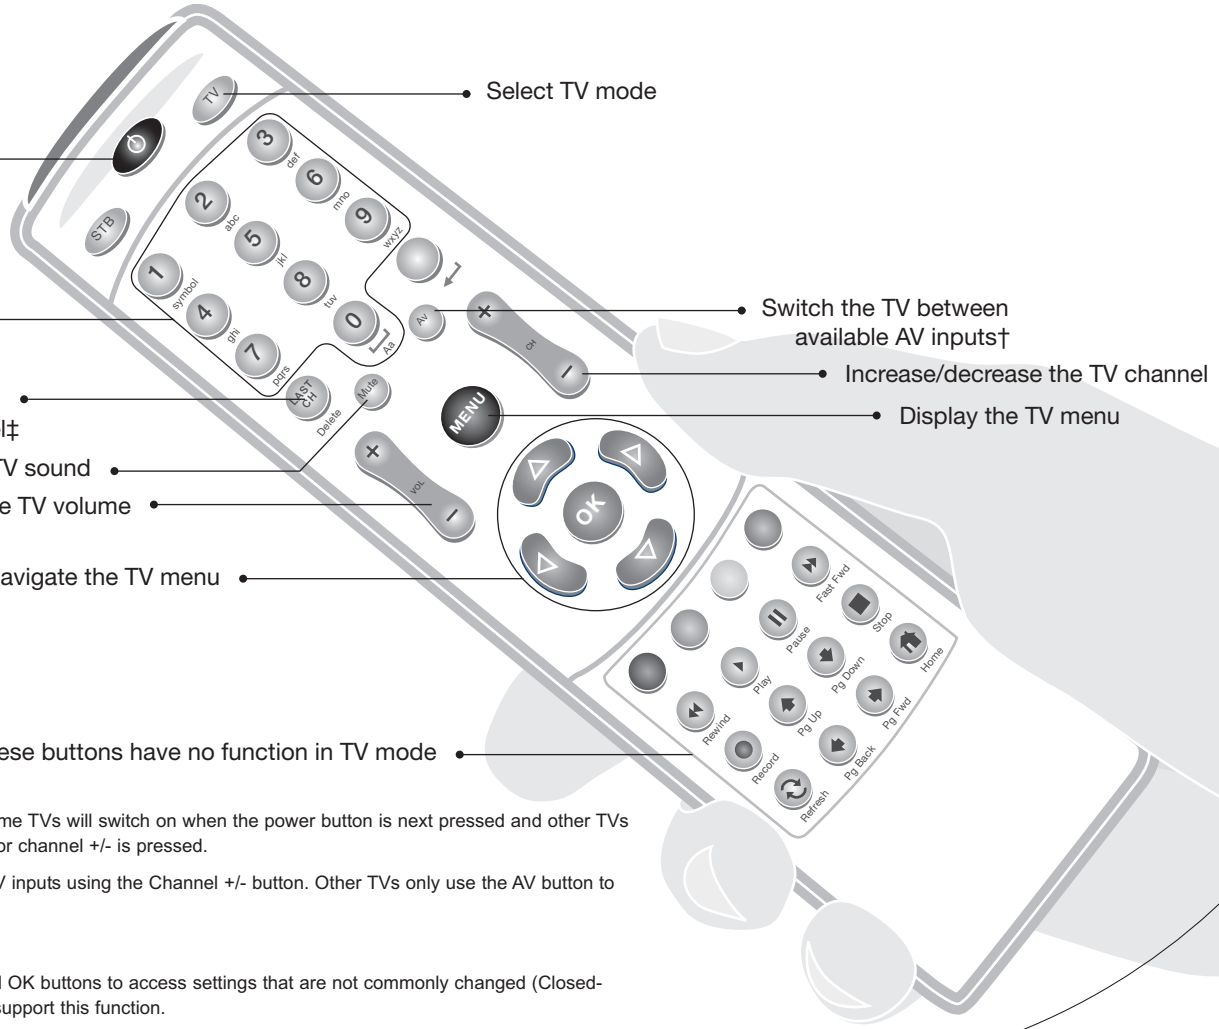

* All TVs will power off with this button. Some TVs will switch on when the power button is next pressed and other TVs will only power on when a channel button or channel +/- is pressed.

† Some TVs will cycle through available AV inputs using the Channel +/- button. Other TVs only use the AV button to access the AV inputs.

‡ Not all TVs support this function.

§ Some TVs use the menu, navigation and OK buttons to access settings that are not commonly changed (Closed-caption display, for example). Not all TVs support this function.

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:45 Page 18

TV brand codes

Americas & APAC

A TANDY	094
ABEX	115
ADMIRA	114, 127, 200
ADVENTURA	113
AIKO	105,112, 197
AIWA	148
ALARON	109, 217
AKAI	033, 110, 111, 157
ALBA	043
ALLERON	109
AMBASSADOR	108
AMERICA	105
AMPRO	234
AMSTRAD	048, 108
ANAM	025, 104, 105, 106, 107
ANAM NATIONAL	104, 214
AOC	036, 041, 102, 103, 111, 116
ARCHER	116
AUDIOSONIC	100
AUDIOVOX	105, 116, 197, 199
BAUER	044
BAUR	100
BAYSONIC	105
BEIJING	151, 155, 156
BELCOR	036, 103, 157
BELL & HOWELL	038, 098, 099
BEON	100
BRADFORD	105
BROCKWOOD	036, 103
BROKSONIC	083, 116, 200
BUSH	100
CANDLE	035, 036, 041, 096, 097, 111, 113, 215
CAPEHART	102
CARNIVALE	041, 157
CARVER	010, 163, 213
CATHAY	100
CELEBRITY	095, 195, 232
CENTURION	041
CHANGHONG	154, 155, 156, 162
CINERAL	105, 197, 199
CITIZEN	035, 036, 041, 092, 093, 094, 096, 097, 105, 111, 112, 113, 149, 197, 215
CLAIRTONE	101
CLARIVOX	100
CONCERTO	035, 097, 215
CONROWA	175
CONTEC	090, 091, 101, 105
CORANDO	094
CRAIG	025, 105
CROSLEY	163, 213
CROWN	094, 105
CURTIS MATHES	016, 036, 038, 041, 055, 069, 075, 093, 094, 098, 111, 114, 127, 149, 163, 196, 198, 212, 213, 215, 219, 228, 229, 231, 233
CXC	105
DAEWOO	029, 030, 033, 036, 072, 094, 100, 103, 105, 112, 119, 153, 157, 158, 159, 160, 199, 197
DANSAI	100
DAYTRON	036, 094, 103
DENON	069
DECCA	027, 100
DIXI	033, 100, 107
DUMONT	001, 036, 089, 103
DWIN	076
DYNATECH	088
ELECTROBAND	095, 101, 195, 232
ELECTROHOME	094
ELECTRON	094
ELIN	100
ELTA	033
EMERSON	000, 002, 006, 007, 008, 009, 011, 036, 038, 041, 081, 082, 083, 084, 085, 086, 087, 090, 092, 094, 098, 101, 103, 105, 108, 109, 200, 217
ENVISION	036, 041, 111
ERRES	100
ETRON	033
FERGUSON	100
FINLUX	100, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288
FISHER	017, 038, 080, 098
FORMENTI	044
FORMONTI	100
FORTRESS	114
FUJITSU	109, 217, 224
FUNAI	048, 105, 109, 141, 150, 152, 217
FUTURETECH	105
GE	013, 016, 020, 036, 041, 075, 076, 077, 078, 079, 081, 086, 104, 114, 127, 196, 199, 212, 214, 228, 229, 231, 233
GEC	027, 100
GEMINI	039
GENEXXA	043
GIBRALTER	089, 103, 111
GOODMANS/ TASHIKO	027, 066, 100
GRADIENTE	028, 065, 157, 215
GRANADA	100
GRUNDIG	178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188
GUNPY	105, 109, 217
H/K	072
HALLMARK	036, 041, 086
HANSEATIC	100
HARLEY DAVIDSON	109, 217
HARMON/ KARDON	163, 213
HARVARD	105, 106
HINARI	100, 109
HITACHI	018, 035, 067, 068, 069, 070, 071, 087, 094, 097, 135, 215
HYPSON	100
HYUNDAI	290
IMA	105
INDIANA	100

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:45 Page 19

INFINITY	163, 213
INFINITY REFERENCE	010
INTERFUNK	100
INTEQ	001, 089
ITT	061
JANEIL	113
JBL	010, 163, 213
JCB	095, 195, 232
JENSEN	031
JINXING	153, 154, 155, 156, 157, 162, 163, 164, 165, 169, 173
JVC	026, 028, 064, 065, 066, 084
KAWASHO	090
KAYPANI	102
KEC	105
KENWOOD	036, 041, 103, 111
KLOSS	063, 072, 113
KONKA	221, 222, 225, 226
KTV	041, 092, 094, 101, 105, 111
LEYCO	100
LG(GOLDSTAR)	003, 012, 035, 036, 041, 073, 074, 086, 094, 097, 100, 103, 111, 115, 215, 239, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264
LIESENK & TTER	100
LLOYTRON	094
LOEWE	100
LOGIK	099, 177
LUXMAN	035, 097, 215
LXI	010, 036, 038, 041, 062, 076, 086, 098, 163, 196, 213, 228, 233
MAGNAVOX	010, 034, 039, 040, 041, 042, 058, 059, 060, 061, 063, 066, 096, 111, 163, 213, 217, 218, 230
MAJESTIC	099
MARANTZ	010, 022, 036, 041, 100, 111, 213
MARK	100
MATSUSHITA	019
MATSUI	027, 033, 100
MEDIATOR	100
MEGATRON	036, 041, 069, 086, 116
MEI	101
M-ELECTRONIC	100
MEMOREX	022, 033, 036, 038, 041, 057, 086, 097, 098, 099, 177, 215, 217
METZ	179, 183, 189, 190, 191, 192, 193, 194
MGA	022, 036, 056, 041, 057, 086, 103, 111
MIDLAND	001, 019, 075, 076, 089, 094, 115, 200, 212, 228, 233
M-ELECTRONIC	075, 089, 196
MINUTZ	079
MITSUBISHI	022, 032, 036, 056, 057, 066, 079, 086, 103, 110, 114, 138
MONTGOMERY	109
MOTOROLA	022, 041, 104, 114, 127, 157, 214
MTC	035, 036, 041, 088, 093, 097, 101, 103, 111, 149, 215
MULTITECH	088, 105, 127
NAD	036, 055, 062, 086, 105
NEC	024, 035, 036, 041, 066, 097, 103, 105, 111, 132, 171, 215
NECKERMANN	100
NEI	100
NIKKAI	027, 043, 100, 115
NIKKO	036, 041, 086, 105, 111, 112, 197
Nokia	272, 291
NOSHI	053
NOVABEAM	072
NTC	105, 112, 157
ONWA	041, 105, 157, 197
OPTIMUS	038, 055, 105
OPTONICA	019, 054, 098, 114, 198
ORION	083, 100, 127, 217
OSAKI	027, 115
OTTO VERSAND	100
PANASONIC	010, 019, 025, 075, 083, 104, 109, 131, 137, 143, 200, 212, 214
PANDA	154, 172
PENNY	016, 019, 036, 041, 052, 053, 062, 073, 075, 076, 078, 079, 086, 093, 094, 103, 104, 111, 115, 116, 212, 215, 228, 231, 233
PEONY	156, 162
PHILCO	036, 041, 058, 059, 060, 061, 062, 063, 069, 075, 079, 096, 103, 111, 149, 157, 196, 213
PHILIPS	010, 040, 069, 100, 157, 163, 200, 213
PHONOLA	100
PILOT	010, 036, 041, 094, 103, 111, 163
PIONEER	051, 055, 087, 157, 223
PORTLAND	036, 094, 103, 105, 112, 198
PRICECLUB	093
PRINCETON	227
PRISM	075, 157, 197, 212
PROSCAN	075, 076, 228, 233
PROTECH	100
PROTON	036, 050, 086, 094, 102, 116, 196, 219
PULSAR	001, 036, 041, 089
PULSER	103
QUASAR	025, 075, 089, 104, 157, 212, 214
QUELLE	100
RADIO SHACK	036, 041, 038, 054, 075, 094, 103, 105, 112, 115, 127, 157, 196, 215, 228, 233
RADIOLA	100
RCA	005, 014, 015, 018, 019, 036, 041, 049, 053, 075, 076, 077, 087, 103, 114, 212, 216, 223, 228, 229, 233, 231, 235, 236, 237
REALISTIC	036, 038, 041, 054, 086, 094, 097, 098,

	103, 105, 111, 115, 157, 196, 215
RHAPSODY	101
R-LINE	100
RUNCO	001, 041, 089, 098, 105, 111, 157, 220
SAISHO	033, 108
SAMPO	036, 041, 094, 102, 105, 111, 115
SAMSUNG	033, 034, 035, 036, 041, 086, 093, 094, 097, 100, 103, 111, 115, 149, 215, 238, 239, 240, 241, 242, 243
SAMSUX	094
SANSEI	199
SANSUI	200
SANYO	017, 023, 027, 038, 066, 080, 091, 098, 123, 125, 126, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211
SBR	100
SCHEIDER	100
SCIMITSU	036, 103, 157
SCOTCH	036, 041, 086
SCOTT	036, 041, 083, 086, 094, 103, 105, 109, 217
SEARS	010, 016, 017, 035, 036, 038, 041, 048, 052, 062, 076, 080, 086, 097, 098, 109, 141, 163, 196, 213, 215, 217, 228, 233
SEMIVOX	105
SEMP	062
SHANGHAI	156, 168
SHARP	046, 047, 054, 066, 091, 091, 111, 114, 127
SHOGUN	036, 103, 157
SIGNATURE	099, 177
SIMPSON	058, 096, 218
SOLAVOX	115
SONOKO	100
SONTEC	100
SONY	037, 045, 066, 084, 095, 128, 144, 195, 232
SOUNDESIGN	036, 041, 086, 096, 105, 109, 217
SOUNDWAVE	100
SPECTRICON	116
SQUAREVIEW	048, 141
SSS	036, 089, 103, 105, 157
STAR-LITE	105
SUPREM	095, 195, 232
SUPRE-MACY	113
SURPA	035, 097
SYLVANIA	010, 036, 041, 044, 058, 059, 060, 061, 063, 096, 111, 157, 163, 213
SYMPHONIC	048, 141
SYSLINE	100
TANDY	027, 043, 114, 127
TATUNG	027, 088, 100, 104, 116, 214
TCL	156, 163, 170
TECHNOL ACE	109, 217
TECHNICS	019, 075, 212
TECHWOOD	035, 075, 097, 157, 212, 215
TEKNIKA	010, 022, 035, 036, 057, 093, 094, 096, 097, 099, 103, 105, 109, 112, 113, 157, 163, 177, 197, 213, 215, 217
TELEFUNKEN	157, 215
TELETECH	033
TERA	050
THAKRAL	167
THOMPSON	289
THORM	100
TMK	035, 036, 041, 086, 097, 108, 215
TNCI	001
TOSHIBA	038, 052, 062, 066, 093, 098, 130, 149
TOSONIC	101
TOTEVISION	094
TRICAL	091
UNIVERSAL	078, 079
UNIVERSUM	100
VECTOR RESEARCH	036, 041, 111
VESTEL	100
VICTOR	028, 065
VIDEO CONCEPT	110
VIDIKRON	010, 021, 163, 213
VIDTECH	036, 041, 086, 103
VIKING	113
WARDS	010, 036, 041, 045, 054, 058, 059, 060, 061, 077, 078, 079, 086, 097, 099, 103, 109, 111, 177, 213, 215, 217
WATSON	100
WHITE WESTINGHOUSE	036, 041, 111, 200
XOGEGO	161, 162, 166, 174, 176
YAMAHA	036, 041, 103, 111
YOKO	100
ZENITH	001, 004, 089, 099, 105, 177, 197, 200, 267, 268, 269, 270, 271
ZONDA	116
ビクター	120, 121, 122
シャープ	124, 127
ゼネラル	129
パイオニア	133
フナイ	134, 136, 141, 145
ダカス	140, 142
サムソン	146
インターコンプ	149
14M01	
ベスト(型式)	134, 136, 141, 145
14M02	
ベスト(型式)	146
14M10	
ベスト(型式)	147
20M01	
ベスト(型式)	134, 136, 141, 145
20M02	
ベスト(型式)	134, 136, 141, 145
20M03	
ベスト(型式)	132
25M010	
ベスト(型式)	147
D25AV10	
ベスト(型式)	147

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:45 Page 21

EMEA

ADMIRAL	041, 045, 091, 102, 108
AIKO	089
AIWA	294, 295
AKAI	006, 010, 023, 119, 135, 159, 164, 179, 189, 198
AKURA	133
ALBA	124, 133, 236
ALBIRAL	197
AMSTRAD	130, 151
ANAM	117
ARC EN CIEL	057
ARCAM	057, 076
ARISTONA	075
ARTHUR MARTIN	045, 164
ASA	041, 045, 052, 078, 087, 102, 108, 142, 205, 209, 215, 255
ASTRA	151
ATANTIC	076
ATLANTIC	076
ATORI	151
AUDIOSONIC	118, 132, 151
AUSIND	049, 141
AUTOVOX	009, 035, 048, 049, 060, 078, 095, 105, 108, 139, 142
BAIRD	110, 135
BANG & OLUFSEN	108, 341, 342
BASIC LINE	132, 133
BAUER	145
BAUR	004, 006, 012, 013, 022, 156
BEKO	249, 250
BLAUPUNKT	022, 023, 024, 025, 047, 074, 220, 221, 222, 223, 224, 226, 257, 258
BRANDT	057, 065, 073, 090, 182
BRIONVEGA	102, 105, 108
BRITANNIA	076
BRUNS	082, 099, 102, 108
BSR	039, 069, 162, 190, 198
BUSH	045, 124, 133, 164, 174, 213, 215
BUSH (UK)	048, 156, 161
CANDLE	079
CENTURY	102, 108
CGE	049, 081, 098, 140, 153, 161, 162, 198, 220, 225, 227
CITIZEN	079
CLARIVOX	082, 096, 197
CLATRONIC	118, 133
CONCERTO	079
CONDOR	076
CONTEC	015, 117
CONTINENTAL EDISON	057, 065, 090
CRAIG	117
CROSLEY	002, 049, 102, 108, 140, 198, 220, 225, 227
CROWN	254
CTC CLATRONIC	026
CXC	117
DAEWOO	010, 150, 151, 261
DANSAI	010
DECCA	027, 058, 060, 097, 110, 169
DECCA (UK)	027, 058, 060, 110, 168
DEGRAAF	045, 135
DIXI	099, 151
DOMEOS	010
DORIC	103
DUAL	009, 060, 161, 164, 210
DUAL-TEC	060, 151, 162, 211
DUMONT	026, 052, 078, 102, 108, 198, 212, 215
DYNATRON	010
ELBE	155, 197, 203
ELECTRO TECH	151
ELEKTRONSKA	077
ELMAN	026, 162
ELTA	151
EMERSON	092, 102, 108, 112, 117, 126, 130
ERRES	010
ETRON	198
EUROPHON	026, 058, 060, 077, 109, 162, 200
FENNER	010, 151
FERGUSON	028, 037, 055, 065, 078, 086, 088, 113, 118, 136, 146, 197, 199, 228, 231, 234
FIDELITY	045, 076, 228
FIDELITY (UK)	056, 059, 193, 228
FILMNET	114
FINLANDIA	045, 232
FINLUX	002, 026, 049, 052, 078, 081, 087, 108, 141, 142,198, 205, 209, 212, 215, 255, 349, 350, 351
FIRST LINE	198
FISHER	002, 009, 014, 051, 060, 080, 082, 098, 102, 108, 198, 209
FORGESTONE	228
FORMENTI	045, 049, 076, 108, 145, 154, 198
FORMENTI-PHOENIX	002, 043, 045, 059, 141
FORTRESS	108
FRONTECH	045, 118, 198
FUJITSU	126
FUNAI	039, 069, 117, 118, 126
FUTURETECH	117
GBC	002, 014, 132, 151, 162, 198
GEC	045, 110, 128, 232
GEC (UK)	003, 008, 058, 060, 110, 128, 156
GELOSO	002, 041, 045, 132, 151, 162, 198
GENERAL TECHNIC	268
GENEXXA	045, 133
GOODMANS	014, 110, 137, 164, 230
GORENJE	098, 106
GRAETZ	045
GRANADA	014, 045, 049, 058, 060, 110, 111, 135, 198, 232
GRANADA (UK)	008, 014, 045, 049, 058, 060, 103, 131, 152, 156,164
GRUNDIG	022, 023, 047, 049, 071, 074, 138, 202, 204, 214, 215, 282, 283, 284, 285
HANSEATIC	002, 012, 014, 043, 059, 156
HANTAREX	058
HEMMERMANN	006
HIFIVOX	033, 057
HINARI	007, 014, 045, 126, 135, 151, 164, 198, 201
HITACHI	000, 001, 003, 008, 014, 029, 033, 034, 045, 060, 063, 070, 128, 156, 160, 182, 183, 184, 186, 187, 188, 189, 194, 198, 205, 232, 234
HYPER	059, 060, 151, 162
HYUNDAI	353
IMPERIAL	045, 049, 081, 098, 140, 161, 162, 220, 225, 227

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:45 Page 22

INGERSOL 151
INNO HIT 058, 060, 084, 110, 133, 137, 151, 201
INNOVATION 259, 260, 261, 262, 264, 265, 266, 271, 272, 276, 277, 278
INTERFUNK 003, 004, 006, 012, 018, 045, 049, 108, 164, 179, 182, 198, 223
IRRADIO 049, 132, 133, 137, 141, 151, 201
ISUKAI 133
ITT 003, 004, 005, 006, 007, 008, 018, 041, 045, 049, 124, 129, 135, 150, 160, 164, 174, 192, 198, 209, 233, 243
ITT-NOKIA 003, 004, 005, 006, 007, 008, 018, 041, 045, 049, 124, 129, 135, 150, 160, 164, 174, 192, 198, 209, 233, 243
JVC 007, 072, 144, 158, 159, 174, 179
KAISUI 059, 132, 133
KAMOSONIC 060
KARCHER 059, 060, 084, 109, 132, 151, 156, 205
KAWASHO 076
KENDO 026
KENNEDY 002, 035, 095, 198
KONKA 270
KORTING 043, 101, 102, 108, 154
K060, 117
LENOIR 060, 151
LEYEO 118
LG(GOLDSTAR) 059, 060, 076, 079, 137, 149, 151, 156, 162, 164, 315, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340
LIFETEC 259, 260, 261, 262, 264, 265, 266, 267, 268, 269, 271, 276, 277, 278
LOEWE OPTA 012, 013, 058, 061, 108
LOGIC 169, 228
LOGIK 055, 168, 228
LOWEWE 083
LUMA 035, 045, 190
LUXMAN 079
LUXMAN STEREO TUNER 079
LUXOR 000, 006, 018, 034, 042, 045, 046, 049, 060, 067, 135, 137, 156, 160, 191, 192, 198
LYCO 118
MAGNADYNE 002, 006, 026, 058, 064, 077, 102, 108, 162, 198
MAGNAFON 026, 049, 058, 059, 064, 076, 109, 200
MANESTH 010
MARANTZ 010
MARELLI 108
MARK 010
MATSUI 006, 045, 060, 069, 110, 115, 124, 127, 130, 151, 156, 168, 169
MAXIMAL 007, 198
MCMICHAEL 128
MEDION 259, 260, 261, 262, 264, 265, 266, 267, 268, 269, 271, 272, 276, 277, 278
MEMOREX 151
METZ 023, 074, 100, 104, 108, 148, 207, 208
MGA 123
MICROMAXX 259, 262, 264, 265, 271, 276, 277, 278
MINERVA 022, 023, 049, 138, 214, 215
MISTRAL 228
MITSUBISHI 014, 020, 023, 066, 119, 120, 123, 167, 169, 174
MIVAR 049, 050, 058, 059, 076, 077, 137, 143, 203
MTC 079
MULTITECH 026, 058, 060, 064, 098, 132, 151
MURPHY 045, 209
MURPHY (UK) 008, 103
N.E.I. 010, 096
NAD 134
NEC 014, 171, 172, 173
NECKERMANN 045, 060, 098, 108, 156, 193, 198, 221, 223, 224
NEDIATOR 010
NICAMAGIC 076
NIKKAI 110, 133, 164, 170, 201
NOBLIKO 026, 049, 059, 064, 138, 141
NOGAMATIC 057
NOKIA 003, 004, 005, 006, 007, 008, 018, 041, 045, 049, 124, 129, 135, 150, 160, 164, 174, 192, 198, 209, 233, 243, 246, 279, 348, 354
NORDMENDE 003, 029, 033, 045, 053, 054, 057, 105, 113, 159, 179, 181, 182, 189, 194, 263
OCEANIC 032, 165, 198
OCEANIC (F) 003, 006, 032, 044, 166
ONCEAS 060
ONWA 117
ORION 006, 039, 069, 085, 121, 124, 125, 130, 148, 151, 168, 169, 198, 237, 242
OSAKA 201
OSAKI 110, 133, 201
OSUME 015
OTTO VERSAND 002, 012, 014, 022, 060, 156, 174, 198
PAEL 059, 141
PANASONIC 003, 020, 021, 045, 070, 131, 175, 196, 256, 274
PANORAMIC 235
PATHE MARCONI 057
PATHE' CINEMA (F) 043, 059, 162, 166, 197
PAUSA 151
PAUZA 151
PERDIO 089, 110
PHILCO 002, 049, 081, 098, 102, 108, 140, 161, 162, 175, 220, 225, 227, 245, 247
PHILIPS 010, 036, 059, 062, 068, 075, 076, 102, 108, 128,203, 228, 229, 243, 244, 251, 273
PHOENIX 108
PHONOLA 075, 108
PIONEER 029, 045, 134, 182
PRANDONI-PRINCE 041, 045, 049, 058, 141
PRANDONI-PROMCE 045, 049, 058
PRIMA 045
PROFEX 198
PROTECH 064, 118, 198

QUELLE 004, 006, 012, 022, 023, 039, 049, 052, 060, 078, 137, 138, 141, 142, 164, 168, 205, 209, 214, 215, 220, 221, 223, 224, 225, 227, 255, 257, 258

RADIOMARELLI 010, 045, 066, 077, 108

RADIONETTE 003, 205, 209

RADIOLA 229

RANK 048, 215

RBM 213, 215

RBM (UK) 048

REDIFFUSION 045, 066, 164, 198, 233

REDIFFUSION (UK) 006, 008, 103

REX 007, 010, 035, 041, 045, 095, 190, 206, 210, 211

RFT 099, 251

ROADSTAR 132, 151, 286, 287, 288, 289, 290, 291, 292, 293

ROTEL 015

SABA 029, 033, 042, 045, 053, 054, 057, 058, 065, 073, 093, 102, 107, 108, 113, 179, 181, 182, 189, 194, 263

SACCS 197

SAISHO 045, 060, 116, 124, 130, 151, 167, 168, 169

SALORA 001, 004, 006, 007, 034, 045, 067, 129, 135, 152, 156, 160, 164, 191, 192, 193, 198, 232

SAMBERS 026, 049, 058, 064, 109, 137, 141, 200

SAMSUNG 010, 060, 084, 098, 110, 118, 137, 151, 201, 314, 315, 316 317, 318, 319

SANYO 014, 015, 040, 060, 080, 082, 098, 102, 110, 111, 129, 135, 169, 174, 205, 209, 255

SBR 068, 075, 128, 228

SCHAUB LORENZ 045

SCHNEIDER 002, 007, 009, 045, 051, 059, 060, 075, 132, 136, 162, 164, 210, 211, 229

SCOTT 117, 126

SEG 026, 060, 082, 099

SEI 064, 069, 108, 130, 148, 198

SELECO 007, 010, 035, 041, 045, 095, 190, 206, 210, 211

SENTRA 160

SHARP 014, 015, 019, 176, 178

SIAREM 002, 026, 058, 064, 102, 108, 198

SICATEL 197

SIEMENS 015, 022, 023, 045, 074, 201, 220, 221, 222, 223, 224, 226, 257, 258

SILVER 118

SINGER 002, 026, 102, 108

SINUDYNE 002, 006, 010, 026, 039, 064, 069, 085, 094, 102, 108, 124, 130, 132, 148, 163, 198

SKANTIC 045

SKYWORTH 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311

SOLAVOX 045, 164, 201

SONOKO 010, 118, 151

SONY 014, 017, 112, 168, 169, 275

SOUNDESIGN 117

SSS 117

STERN 007, 010, 035, 041, 045, 095, 190, 206, 210, 211

SUNKAI 069

SUPRA 079

TANDBERG 016, 033, 061, 102, 142, 177, 179, 208

TANDY 019, 045, 133, 153

TASHIKO 014

TATUNG 027, 058, 060, 097, 110, 168, 169

TCL 296, 297

TCM 262, 264, 271, 276, 277, 278

TECHNICS 131

TECHWOOD 079

TEKNIKA 117, 123, 126

TELE 114

TELEAVIA 057, 065, 073, 182

TELEFUNKEN 029, 030, 031, 055, 073, 113, 147, 159, 179, 180, 181, 182, 199, 216, 217, 218, 219, 220, 225, 227, 252, 263

TELETECH 151

TEMPEST 238, 239, 240, 241

TENSAI 133, 209

TEXET 060

THOMSON 033, 048, 053, 057, 063, 065, 073, 090, 124, 157, 159, 179, 181, 182, 189, 194, 253, 352

THORN 074, 086, 209, 225, 227, 228

THORN-FERGUSON 028, 037, 055, 065, 078, 086, 088, 113, 118, 136, 146, 197, 199, 228

TMK 014, 079, 147

TOSHIBA 014, 038, 048, 122, 127, 170, 174, 185, 215, 280, 281

TRANS CONTINENS 045

TRISTAR 228

TRIUMPH 048, 058, 212

UHER 043, 045, 048, 049, 051, 131, 154

ULTRAVOX 002, 026, 059, 102, 108, 198

UNITED 288, 290, 312, 313

UNIVERSUM 118, 205

UNIVOX 197

VEGAVOX 081

VEXA 010, 151

VICTOR 144, 159

VIDEOTON 248

VORTEC 010, 065

VOXSON 041, 045, 049, 102, 108

WALTHAM 045

WATSON 043, 220, 224

WATT RADIO 002, 006, 026, 059, 064, 076, 109, 197, 198, 200

WEGA 014, 108, 198

WEGA COLOR 102

WELTBLICK 010

WESTON 162

WHITE WESTINGHOUSE 010, 026, 043, 059, 076, 140, 154

YOKO 060, 151

ZANUSSI 007, 010, 035, 041, 045, 095, 190, 206, 210, 211

ZENITH 343, 344, 345, 346, 347

ZOPPAS 045

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:45 Page 24

Specification

(Multiple standards)

AmiNET125

Physical specifications

Weight	280g (9.9oz)
Dimensions (including rear connectors but excluding base)	(approximately) 110mm (4.33") long, 115mm (4.53") wide, 38mm (1.50") high
Operating Temperature	0°C (32°F) to 40°C (104°F)
Storage Humidity	5% ~ 95% RH (non-condensing)

RF Modulator

RF Input connector	75 ohm F Connector
Output channel	VHF channel 3 or 4 (US) UHF channel 21 to 68 (EU) UHF channels 1 or 2 (Japan)
TV standard	PAL/NTSC standard definition
RF output connector	75 ohm F Connector

Ethernet Interface

Ethernet connector	RJ-45 shielded connector
Cabling	UTP and STP Cat 5
Speed	Auto sensing 10/100Mbit/s
Indicators	Green LED - Link, Yellow LED - Activity

USB Interface

Type	USB 2.0

Smart Card

Type	ISO 77816 parts 1, 2 & 3
Voltages supported	3.3v and 5v cards

Digital Audio Interface

Type	S/P DIF electrical to IEC 61937
Connector	RCA (Black)
Impedance	75 ohm
Output	0.4Vpp .. 0.6Vpp, <0.05Vdc (75ohm terminated)

Power Interface

Connector	DC10B 2.5mm x 5.5mm
Type	DC power socket, centre positive
Input	5V
Power	Max 6W

Transport Stream System

MPEG	MPEG-2 ISO/IEC 13818-1

Transport Stream Decoders

Profile	MPEG-4 pt10/H.264 MPEG-4 pt2 MPEG-2 pt2
Aspect Ratio	4:3, 16:9
Video Resolution	NTSC (720 x 480i), PAL (720 x 576i)
Graphics Resolution	640 x 480 (525 line) NTSC or 640 x 576 (625 line) PAL, 15-bit RGB color, Alpha blending.
Audio Decoding	Dolby Digital (AC-3), MPEG-1 layers I and II, MPEG-4 low complexity AAC, 16-bit PCM

Analogue Audio

Audio Connectors (except SCART)	RCA, White = Left channel, Red = Right channel
Output	2v RMS nominal
Impedance	10k ohm

Video Cables

Composite Video Interface

Type	Composite Video
Connector	RCA (Yellow)
Output	1Vp-p

SCART

Type	Seperate Red, Green, Blue signals. L, R Audio & Composite video also provided
Connector	21 PIN
Output	1Vp-p

S-Video

Type	Y/C (separate Luminance and Chrominance)
Connector	4-pin Mini-DIN
Output	1Vp-p

Component Video

Type	Separate Luminance and Red and Blue color difference signals
Connectors	3 x RCA, Green = Y, Red = Pr, Blue =Pb
Output	1Vp-p

External Power Supply

Specification

Type	High-efficiency switch-mode
Input	100~240V AC, 50~60Hz, 0.2A Max
Output	5.2V DC, 1.2A

Packaging

Specification

Type	Cardboard Printed Gift-Pack
Weight (includes power supply, US mains lead, Amino Remote control and all leads)	910g (32.1oz)
Dimensions (approximate)	70mm (2.6”) high, 310mm (12.2”) wide, 205mm (8.0”) deep

AmiNET125 User Guidev1arial.qxp 31/07/2006 11:45 Page 25

Index

A

accessories 4
Amino remote control 9
  childproof feature 10
  configuring 16
  functions in STB mode 13
  functions in TV mode 17
  inserting batteries 9
audio connections 7

B

back panel connections 6
brand codes 18

C

connecting the AmiNET125 5
connections 6
  audio 7
  RF 6
  video 7

D

digital TV network, connecting to 8

P

power, connecting 8

R

remote control 9
  childproof feature 10
  configuring 16
  functions in STB mode 13
  functions in TV mode 17
  inserting batteries 9
RF connections 6

S

STB mode functions 13
switching on or off 12

T

TV brand codes 18
TV mode functions 17
TV, controlling 16

U

unpacking the AmiNET125 4

V

video connections 7